


# 3760S

# ULTRA PRODUCTIVE VOC HI-TEMP CLEAR

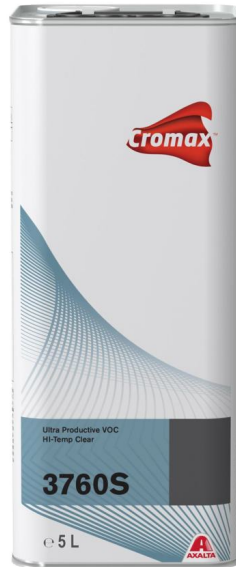

## PRODUCT DESCRIPTION

Ultra Productive VOC HI-Temp Clear 3760S is the fastest drying clearcoat for any temperature, from winter cold to summer heat. It provides the right mix for nearly all operating conditions and can be applied over waterborne and solventborne basecoats. It is part of an Ultra Productive 2K VOC clearcoat system.

**Most productive clear at high temperatures**

## FEATURES

- 01** Application in 1.5 coats helps to save time and product.
- 02** Delivers consistently good, durable high-build finish under almost any ambient temperature.
- 03** Offers short flash-off times between coats and bake cycles.
- 04** Designed for application under high temperature conditions.
- 05** Helps increase productivity whether air drying, baked at low temperatures or using IR drying.
- 06** Has excellent polishing qualities.
- 07** Can be applied over Cromax solventbased and waterbased basecoats.

# TECHNICAL DATA SHEET

## 3760S




### ULTRA PRODUCTIVE VOC HI-TEMP CLEAR

#### Product preparation - application STANDARD



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Cromax Pro Basecoat / Centari Basecoat: Surfaces must be dried / flashed-off in accordance with TDS before application  
Existing finishes: Surfaces must be sanded and degreased before application



M-6152

	Spot & panel repair (25-38°C)		Standard (25-38°C)		Large surface (21-30°C)		Large surface (28-38°C)	
	Volume	Weight	Volume	Weight	Volume	Weight	Volume	Weight
<b>3760S</b>	3	100	3	100	3	100	3	100
<b>XK203 / XK205</b>	1	36	-	-	-	-	-	-
<b>XK205 / XK206</b>	-	-	1	36	-	-	-	-
<b>XK206</b>	-	-	-	-	1	36	1	36
<b>3989S</b>	-	-	-	-	-	-	0.4	13
<b>431R * / XB387 **</b>	0.4	12	-	-	-	-	-	-
<b>XB387</b>	-	-	0.4	12	0.4	12	-	-

\* 431R is recommended for spot and panel repair only.

\*\* XB387 for use on horizontal parts



Pot life at 20°C: 1 hr 30 min



	Spray nozzle	Spray pressure	
<b>Compliant</b>	1.3 - 1.4 mm	1.8 - 2.2 bar	inlet pressure
<b>HVLP</b>	1.3 - 1.4 mm	0.7 bar	atomisation pressure

see manufacturer's instructions



0.5 + 1  
1 operation coat  
1st: thin and closed  
2nd: normal

with intermediate flash-off: 0 min - 2 min  
final flash-off: 5 min - 10 min



	XK203 / 431R	XK203 / XB387	XK205 / 431R	XK205 / XB387	XK206 / XB387	XK206 / 3989S
<b>28 °C</b>	2 hr	3 hr	2 hr 30 min	6 hr	-	-
<b>50 °C</b>	20 min	20 min	20 min	-	-	-
<b>60 - 65 °C</b>	15 min	15 min	15 min	25 min	30 min	35 min

For drying options, see details page.



Guideline for short wave IR equipment  
Half power: 5 min  
Full power: 10 - 15 min

VOC compliant

2004/42/IIB(d)(420) 420: The EU limit value for this product (product category: IIB(d)) in ready to use form is maximum 420 g/l of VOC. The VOC content of this product in ready to use form is maximum 420 g/l.

# TECHNICAL DATA SHEET



## 3760S

### ULTRA PRODUCTIVE VOC HI-TEMP CLEAR

#### Products

3760S Ultra Productive VOC HI-Temp Clear

XK203 Low Emission Activator Fast

XK205 Low Emission Activator


XK206 Low Emission Activator Slow

3989S Retarder


431R Varispeed Ultra

XB387 HI-Temp Thinner

#### Product mix



Mixing ratios with special agents are available in the productmix table on ChromaWeb and in the specific TDS.



ISO 4: 49 - 61 s at 20°C  
DIN 4: 19 - 22 s at 20°C




50 - 60 µm



	3760S		XK203 431R		XK205 431R		XK203 XB387		XK205 XB387		XK206 XB387		XK206 3989S	
	Dark	Light	Dark	Light	Dark	Light	Dark	Light	All colours	All colours	All colours	All colours	All colours	
<b>Flash time</b>	4 min	4 min	4 min	4 min	4 min	4 min	4 min	4 min	5 min	5 min	5 min	5 min	5 min	
<b>Distance</b>	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	80 cm	80 cm	80 cm	80 cm	80 cm	
<b>Half power</b>	6 min	6 min	6 min	6 min	6 min	6 min	6 min	7 min	5 min	5 min	5 min	5 min	10 min	
<b>Full power</b>	3 min	6 min	4 min	7 min	4 min	7 min	5 min	7 min	15 min	20 min	20 min	20 min	20 min	

Guideline for short wave IR equipment



3760S Ultra Productive VOC HI-Temp Clear can be recoated within 24 hours, without intermediate sanding

# TECHNICAL DATA SHEET

## 3760S



## ULTRA PRODUCTIVE VOC HI-TEMP CLEAR



Clean after use with a suitable solventbased guncleaner.

### Remarks

- Material has to be at room temperature (18-25°C) before use.
- Allow additional time for preheating up to panel temperature.
- Surplus ready for use material should not be returned to original can.
- Close can of Activator tightly immediately after use, as this product will react with humid air and water and lose its hardening effect.
- Can also be applied in 2 coats, respecting 10 min intermediate flash off and 10 min flash off before bake.
- Dry spray spots in the clear can be worked off with AK350/AK350A at very low spray pressure. This should be done at the latest 5 min after clear application and should be avoided on horizontal parts.
- Can also be used over activated Centari Basecoat.
- For Semi-Flexible systems 10% 805R Flexible Additive can be added to the base material. Activator and Thinner ratios remain equal.
- For Full-Flexible systems the mixing ratios are available in the productmix table on Chromaweb.

Consult Safety Data Sheet prior to use. Observe the precautionary notices displayed on the container.

All other products referred to in the refinish build up are from our Cromax product range. System properties will not be valid when the related material is used in combination with any other materials or additives which are not part of our Cromax product range, unless explicitly indicated otherwise.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.